

FHC Series
SMD Flat Wire High Current Inductor
Size 1890




CHARACTERISTICS

- Low Rdc with flat wire design
- Low cooper losses at high frequency
- Magnetic shielded structure
- Quantity: 150pcs


APPLICATION

- High current DC/DC converter
- LC filter

Dimensions: [mm]

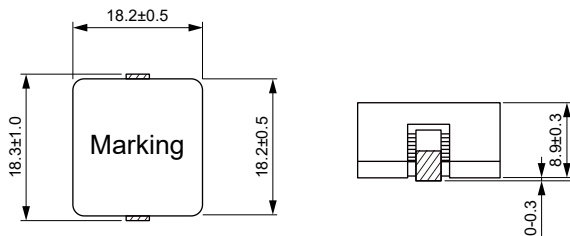

Land Pattern: [mm]

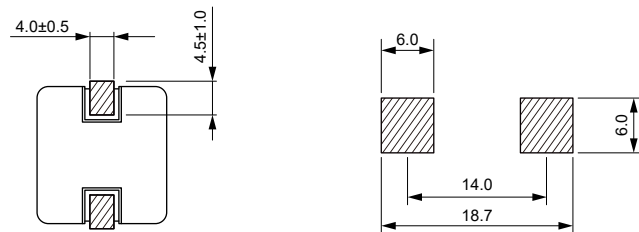

Electrical Properties:

| Part No | Inductance (μH) | Tolerance | Temperature Rise Current (A) | Saturation Current (A) | DC Resistance Typ. (mΩ) | DC Resistance Max. (mΩ) |
|--------------|-----------------|-----------|------------------------------|------------------------|-------------------------|-------------------------|
| FHC1890-R82M | 0.82 | ±20% | 41.5 | 65.0 | 0.54 | 0.59 |
| FHC1890-1R3M | 1.30 | ±20% | 34.5 | 62.0 | 0.94 | 1.03 |
| FHC1890-1R9M | 1.90 | ±20% | 32.5 | 52.0 | 1.20 | 1.30 |
| FHC1890-2R6M | 2.60 | ±20% | 31.5 | 50.0 | 1.58 | 1.74 |
| FHC1890-3R5M | 3.50 | ±20% | 22.5 | 37.0 | 3.10 | 3.40 |
| FHC1890-4R5M | 4.50 | ±20% | 20.5 | 37.0 | 3.40 | 3.70 |
| FHC1890-5R6M | 5.60 | ±20% | 19.0 | 33.0 | 3.70 | 4.10 |
| FHC1890-6R8M | 6.80 | ±20% | 18.5 | 27.0 | 4.10 | 4.50 |
| FHC1890-100M | 10.0 | ±20% | 15.0 | 21.5 | 6.90 | 7.60 |

Operating Temperature : -40 °C to +125 °C

Temperature Rise Current: the actual value of DC current when the temperature rise is ΔT50 °C

Saturation Current that will cause initial inductance to drop approximately 30%

Typical Electrical Characteristics:

