


**MDA HT Series**  
**SMD Low Profile High Current Molded Inductor**  
**Size 8054**




**FEATURES**

- Low loss realized with low DCR.
- Ultra low buzz noise, due to composite construction .
- 100% Lead(Pb)-Free and RoHS compliant.
- High performance (Isat) realized by metal dust core.
- AEC-Q200 qualified.
- Operating temperature: -55 to +155 °C (including self-temperature rise)
- Quantity: 500PCS


**APPLICATION**

- Headlamps, tail lamps and interior lighting
- HVAC
- Doors, window lift and seat control
- Audio subsystem
- Digital instrument cluster
- In-Vehicle Infotainment and navigation

**Dimensions: [mm]**

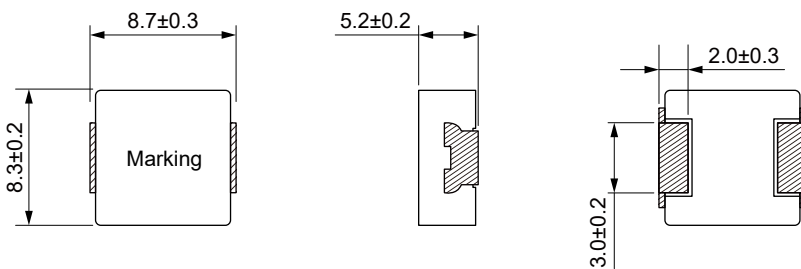

**Land Pattern: [mm]**












**Electrical Properties:**

Part No	Inductance @ 100KHz/1V (µH)	Tolerance	Temperature Rise Current Typ. (A)	Temperature Rise Current Max. (A)	Saturation Current Typ. (A)	Saturation Current Max. (A)	DC Resistance Typ. (mΩ)	DC Resistance Max. (mΩ)
MDA8054HT-1R0M	1.0	±20%	15.5	14.0	22.0	19.0	4.0	4.8
MDA8054HT-2R2M	2.2	±20%	14.5	13.0	18.0	15.5	6.5	7.8
MDA8054HT-3R3M	3.3	±20%	13.5	12.5	16.3	14.0	9.5	11.4
MDA8054HT-4R7M	4.7	±20%	11.0	10.0	12.0	11.0	13.0	15.6
MDA8054HT-5R6M	5.6	±20%	11.0	9.0	15.0	13.0	18.0	22.0
MDA8054HT-100M	10.0	±20%	7.8	6.8	9.0	7.7	29.0	35.0
MDA8054HT-150M	15.0	±20%	6.0	5.5	7.8	6.7	44.0	52.8
MDA8054HT-220M	22.0	±20%	5.5	5.0	7.2	6.2	56.0	67.0
MDA8054HT-470M	47.0	±20%	3.5	3.0	5.2	4.5	122	135


Saturation Current will cause L to drop approximately 30%

Temperature Rise Current: The actual value of DC current when the temperature rise is  $\Delta T=40^{\circ}\text{C}$

Typical Electrical Characteristics:

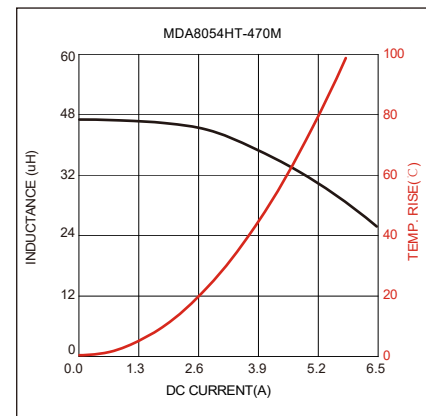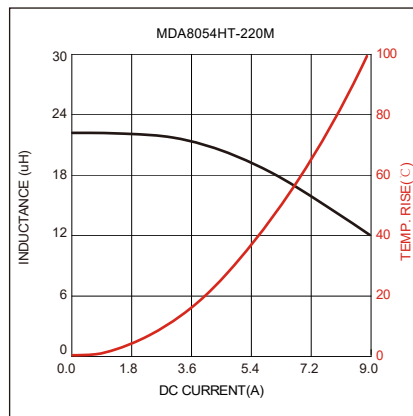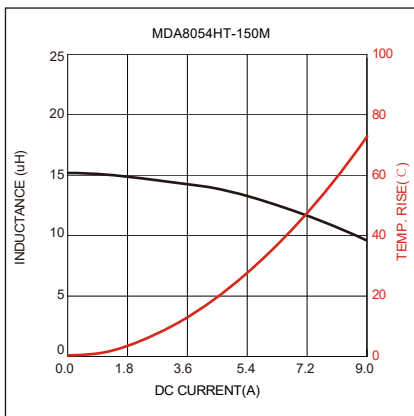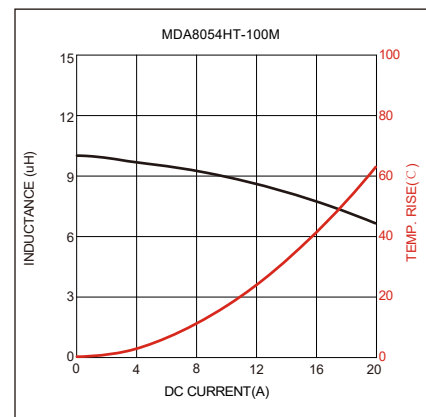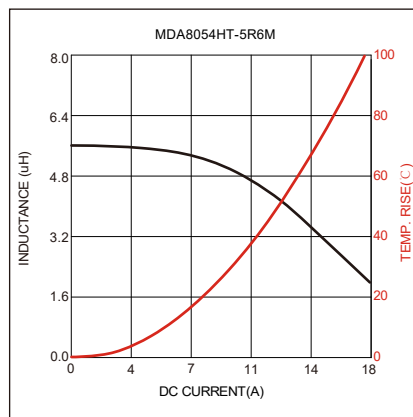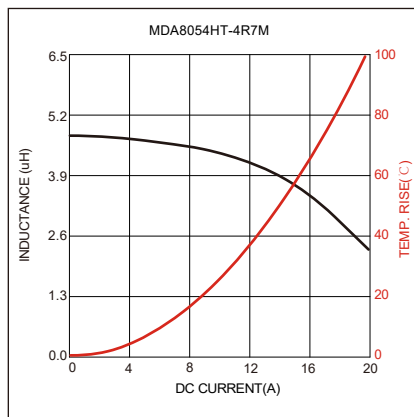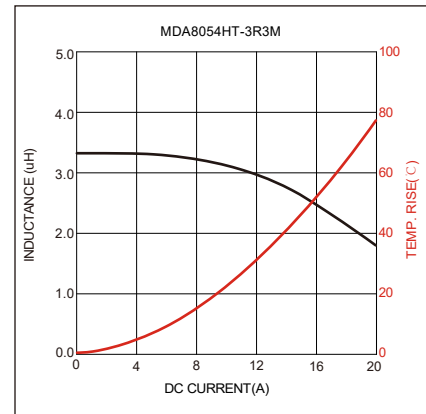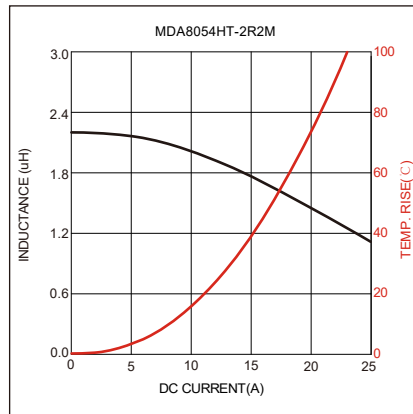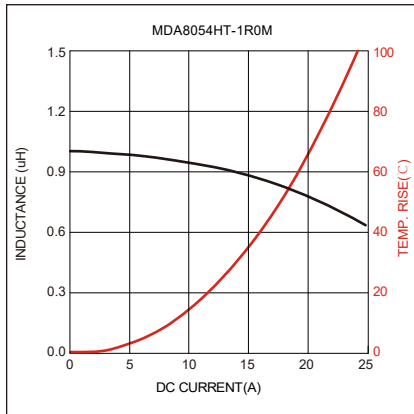


### Soldering Reflow:

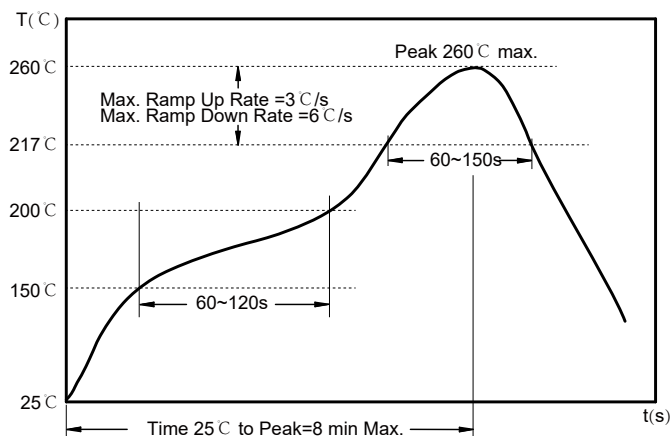

Preheat condition: 150 ~200 °C / 60~120 sec.  
 Allowed time above 217 °C : 60~150 sec.  
 Max temperature: 260 °C .  
 Allowed Reflow time: 2x max.


### Packaging Information:

#### Tape Dimension :

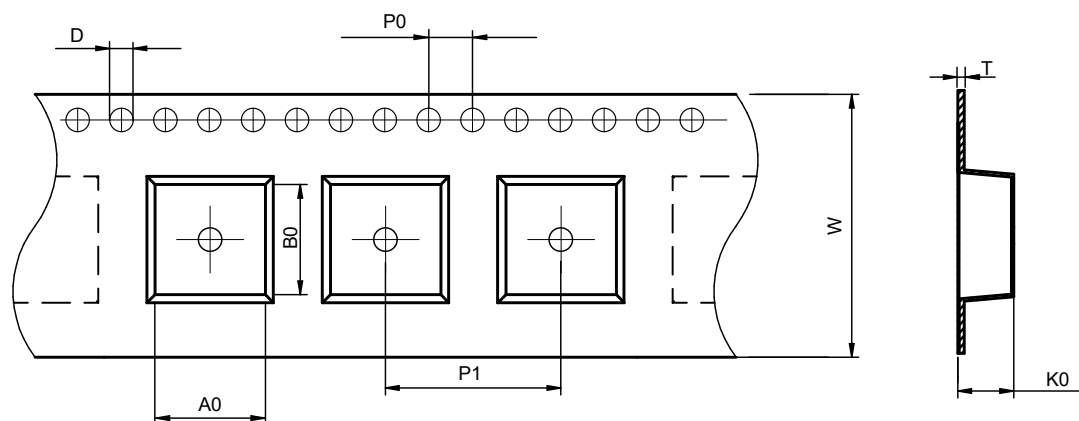

Series	A0 (mm)	B0 (mm)	D (mm)	P0 (mm)	P1 (mm)	W (mm)	K0 (mm)	T (mm)
MDA8054HT	8.9±0.1	9.0±0.1	1.5±0.1	4.0±0.1	16.0±0.1	24.0±0.3	5.9±0.1	0.40±0.05

#### Peel force of top cover tape:

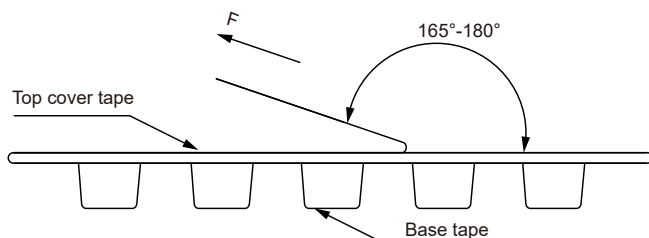


The peel force of top cover tape shall be between 0.1 to 1.27 N


#### Product Marking:

Marking	Printing (Inductance)
---------	-----------------------

Reel Dimension: [mm]

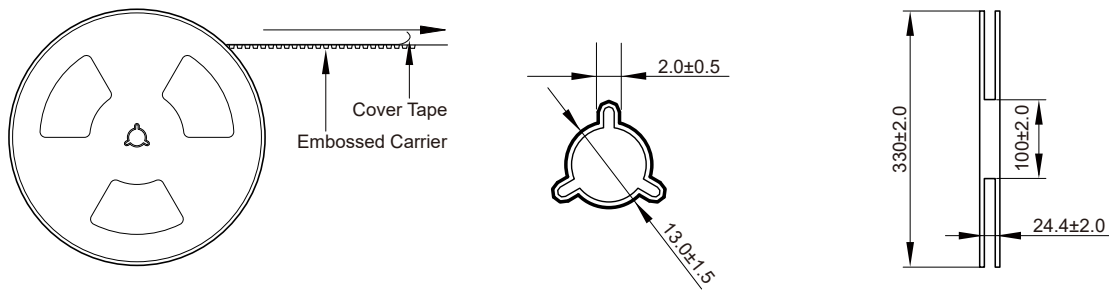

Packaging Quantity:

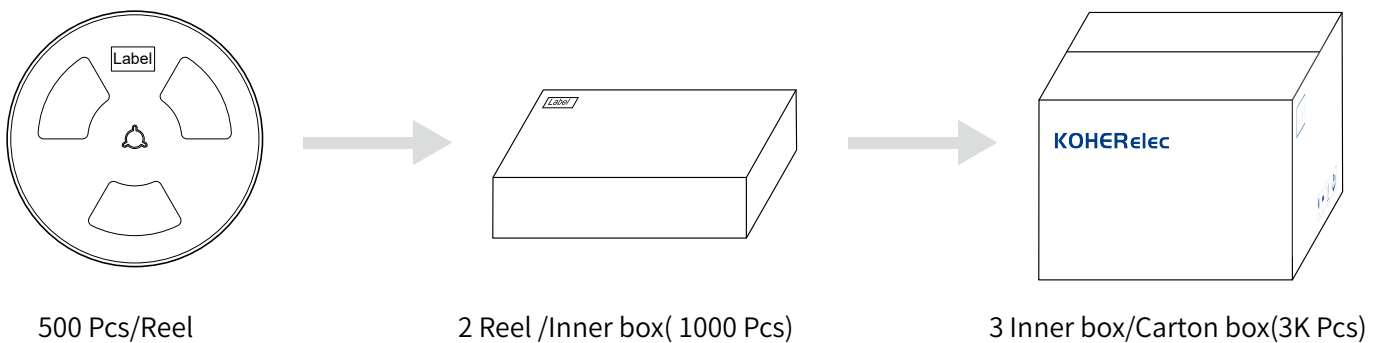

Cautions and Warnings:

Storage Conditions :

- The storage period is within 12 months after the completion of production. Be sure to follow the storage conditions (temperature: -5 to 35°C, humidity: 75% RH Max).If the storage period elapses, the soldering of the terminal electrodes may deteriorate.The warranty period is one year.
- Product should not be exposed to environment with high temperature, high humidity, dust, corrosive gas and etc.
- Products should be handled with care to avoid damage or contamination from perspiration and skin oils.
- Please always handle products carefully to prevent any damage caused by dropping down or inappropriate removing.

Operation Instructions:

- Self heating (temperature increase) occurs when the power is turned ON, so the tolerance should be sufficient for the set thermal design.
- Before soldering, be sure to preheat components.The preheating temperature should be set so that the temperature difference between the solder temperature and chip temperature does not exceed 150°C.
- Soldering corrections after mounting should be within the range of the conditions determined in the specifications.If overheated, a short circuit, performance deterioration, or lifespan shortening may occur.
- Generally, Koher might not be familiar with either customer's specific application or actual requests as customer does.As a result customer shall be responsible for checking and confirming whether Koher product with the performance described in the product specification is suitable for using in customer's particular application or not.